





PROYECTORES



FISSION VII		70W 5500K	
Altura		Luxes	
4,0 m		175 lx	
5,0 m		119 lx	
6,0 m		81 lx	
7,0 m		62 lx	
8,0 m		49 lx	

REFERENCIA	CONSUMO	VOLTAJE		FACTOR DE POTENCIA		EFICIENCIA		LÚMENES
1321430751/2	30W	AC 220V (85V~265V) (50~60Hz) DC 12V (10~15V) DC 24V (22V~28V)		> 0,9	100 lm/W			3000 lm
1321440751/2	40W							4000 lm
1321450751/2	50W							5000 lm
1321460751/2	60W							6000 lm
1321470751/2	70W							7000 lm
RANGO DE TEMP.	ANGULO	CRI	COLOR	VIDA ÚTIL	IP	PESO	MATERIALES	
-40°C ~ +45°C	65°	Ra>80	5500K/3000K	>50.000hrs	65	3,3Kg	Aluminio de alta pureza - Cristal templado 5mm	

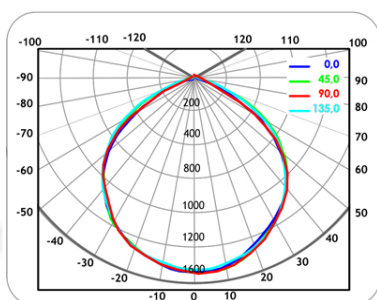

FISSION PROYECTOR XIV 140W 5500K			Altura
Luxes			
1070 lx	653 lx	317 lx	2,0 m
530 lx	437 lx	289 lx	3,0 m
311 lx	283 lx	251 lx	4,0 m
218 lx	208 lx	171 lx	5,0 m
158 lx	153 lx	115 lx	6,0 m
124 lx	119 lx	103 lx	7,0 m

REFERENCIA	CONSUMO	VOLTAJE		FACTOR DE POTENCIA		EFICIENCIA		LÚMENES
1321540751/2	80W	AC 220V (85V~265V) (50~60Hz) DC 24V (22V~28V)		> 0,9	100 lm/W			8000 lm
1321550751/2	100W							10000 lm
1321560751/2	120W							12000 lm
1321570751/2	140W							14000 lm
RANGO DE TEMP. LUMINICA	ANGULO	CRI	COLOR	VIDA ÚTIL	IP	PESO	MATERIALES	
-40°C ~ +45°C	65°	Ra>80	5500K/3000K	>50.000 hrs	65	10,6 Kg	Aluminio de alta pureza - Cristal templado 5mm	

